



## BICONICAL ANTENNA

### BA30M200M

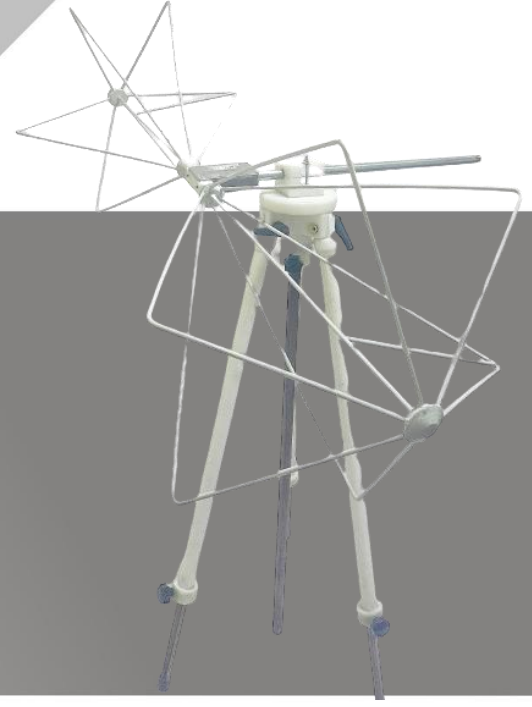

Biconical Antenna, is used to measure the radiated emission in 30 MHz to 200 MHz frequency range according to various standard (CISPR, MIL, ETSI ). The antenna consist of balun and double cone elements. Biconical antenna may also designed as transmit antenna for immunity tests upon request.

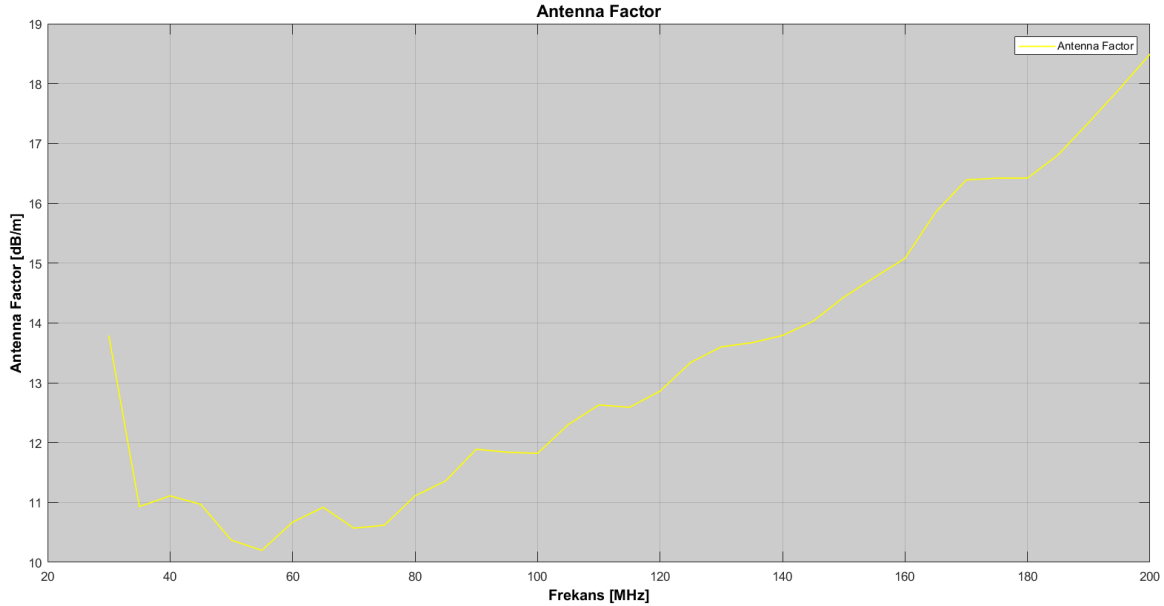

#### Technical Specification

Frequency Range	30 MHz – 200 MHz
Antenna Factor	Individually calibrated
Connector Type	N